


Casing joint, shrinkable, L=500mm, packed in foil, Standard

1. Product application

Belmaflex casing joints, shrinkable are designed to create a perfect and strong joint in the connection areas of the two preinsulated pipes.

2. Product parameters

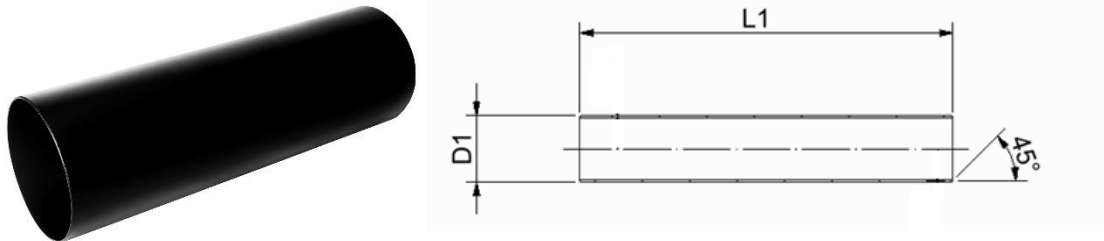

casing pipe outside diam [mm]	item no	L1 [mm]	min inside diameter before shrinking [mm]	WT* [mm]
75	110753005010	500 ±10	89	3
90	110903005011	500 ±10	105	3
110	111103005011	500 ±10	122	3
125	111253005011	500 ±10	140	3
140	111403005011	500 ±10	155	3
160	111603005011	500 ±10	176	3
180	111803005011	500 ±10	197	3
200	112003205011	500 ±10	217	3,2
225	112253405011	500 ±10	243	3,4
250	112503605011	500 ±10	269	3,6
280	112803905011	500 ±10	299	3,9
315	113153905011	500 ±10	336	3,9
355	113554505011	500 ±10	378	4,5
400	114005305011	500 ±10	420	5,3
450	114505205011	500 ±10	470	5,2
500	115005805011	500 ±10	520	5,8
560	115606005011	500 ±10	581	6,0
630	116307005011	500 ±10	659	7,0
710	117109805011	500 ±10	738	9,8
800	118001105011	500 ±10	836	11
900	119001255011	500 ±10	936	12,5
1000	111001295011	500 ±10	1042	12,9
1100	111101335011	500 ±10	1142	13,3
1200	111201385011	500 ±10	1242	13,8

*WT concern raw PE pipe material thicknesses before expansion / downsizing

Casing joint, shrinkable, L=500mm, packed in foil, Standard

- ❖ Belmaflex Casing Joints are also supplied in standard lengths 600, 700, 1000, 1200, 1400mm or can be supplied in any other lengths on customer request
- ❖ Belmaflex Casing Joints can be also supplied in **EXTRA WALL THICKNESS** version dedicated for electrical or extrusion welding
- ❖ In case of a need for a specific product please contact our sales department

3. Material

High density polyethylene (material classification PE100)

4. Marking

White identification label placed in the middle of the joint with information about the product parameters and production date.

5. Packing

According to the agreement with the customer products can be additionally supplied with below accessories:

- mastic (integrated or loose)
- shrink collars
- welding and venting plugs

6. Transport

General transport conditions apply as follow:

- Transport on a pallets
- The pallet should be wrapped with protective plastic foil in order to protect against dust, dirt and damage
- Protect the cargo against sunlight,
- Protect the cargo against rainfall/snowfall
- Pallets should be protected against falling and movement during transportation

7. Storage

General storage conditions apply as follow:

- store indoors or under cover,
- store in vertical position on a flat surface,
- protect against the possibility of damaging of products protective plastic foil
- protect from sunlight
- protect against rainfall/snowfall.
- in order to not activate the shrinking process (from 50°C) store in maximal temperatures not higher than 40 ° C

Belmaflex is not responsible for product damages caused by inappropriate storage.