


### End casing, shrinkable, L=500mm, packed in foil

#### 1. Product application

Belmaflex end casings, shrinkable are designed to create a perfect and strong finish on the pre-insulated pipe.

#### 2. Product parameters

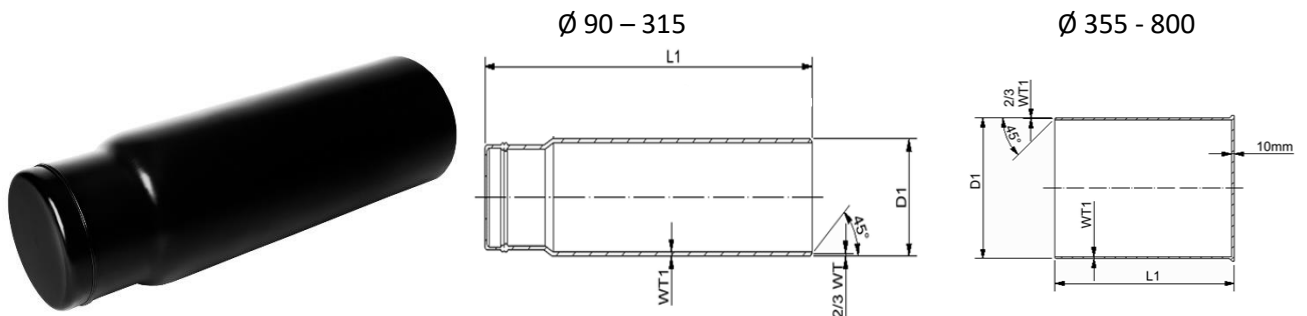

casing pipe outside diam [mm]	item no	L1 [mm]	min inside diameter before shrinking [mm]	WT* [mm]
90	260903005019	500 ±10	105	3
110	26110005019.1	500 ±10	125	3
125	261253005019.1	500 ±10	140	3
140	261403005019.1	500 ±10	155	3
160	261603005019.1	500 ±10	176	3
180	261803005019.1	500 ±10	197	3
200	262003205019.1	500 ±10	217	3,2
225	262253405019.1	500 ±10	243	3,4
250	262503605019.1	500 ±10	269	3,6
280	262806905019.1	500 ±10	299	3,9
315	263154505019.1	500 ±10	336	3,9
355	263554505019.1	500 ±10	378	4,5
400	264004905019.1	500 ±10	420	5,3
450	264505805019.1	500 ±10	470	5,2
500	265007005019.1	500 ±10	520	5,8
560	265608805019.1	500 ±10	581	6,0
630	266309805019.1	500 ±10	659	7,0
710	267101105019	500 ±10	738	9,8
800	268001115019	500 ±10	836	11

\*WT concern raw PE pipe material thicknesses before expansion / downsizing

- ❖ Belmaflex End casings are also supplied in standard lengths 500mm and can be supplied in any other lengths on customer request
- ❖ In case of a need for a specific product please contact our sales department

**End casing, shrinkable, L=500mm, packed in foil**

#### 4. Material

High density polyethylene (material classification PE100)

#### 5. Marking

White identification label placed in the middle of the product with information about the product parameters and production date.

#### 6. Packing

According to the agreement with the customer products can be additionally supplied with below accessories:

- mastic (integrated or loose)
- shrink collar (TPSM)
- welding and venting plugs

#### 7. Transport

General transport conditions apply as follow:

- Transport on a pallets
- The pallet should be wrapped with protective plastic foil in order to protect against dust, dirt and damage
- Protect the cargo against sunlight,
- Protect the cargo against rainfall/snowfall
- Pallets should be protected against falling and movement during transportation

#### 8. Storage

General storage conditions apply as follow:

- store indoors or under cover,
- store in vertical position on a flat surface,
- protect against the possibility of damaging of products protective plastic foil
- protect from sunlight
- protect against rainfall/snowfall.
- in order to not activate the shrinking process (from 50°C) store in maximal temperatures not higher than 40 ° C

Belmaflex is not responsible for product damages caused by inappropriate storage.