


### End casing, shrinkable, L=700mm, packed in foil

#### 1. Product application

Belmaflex end casings, shrinkable are designed to create a perfect and strong finish on the pre-insulated pipe.

#### 2. Product parameters

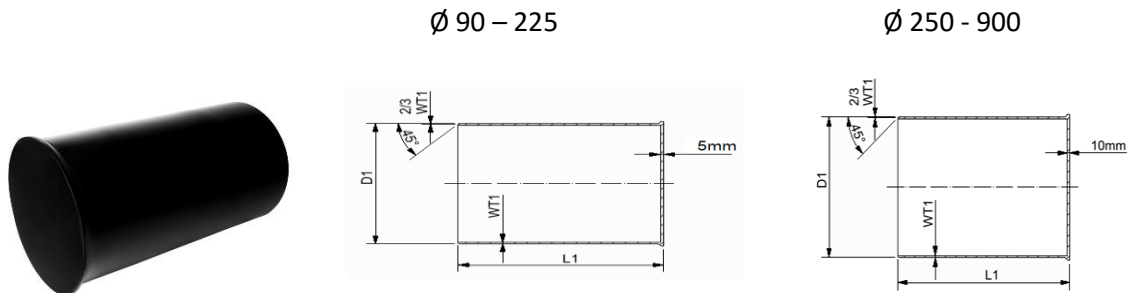

casing pipe outside diam [mm]	item no	L1 [mm]	min inside diameter before shrinking [mm]	WT* [mm]
90	27090090070019	700 ±10	105	3
110	27110110070019.1	700 ±10	122	3
125	27125125070019.1	700 ±10	140	3
140	27140140070019.1	700 ±10	155	3
160	27160160070019.1	700 ±10	176	3
180	27180180070019.1	700 ±10	197	3
200	27200200070019.1	700 ±10	217	3,2
225	27225225070019.1	700 ±10	243	3,4
250	27250250070019.1	700 ±10	269	3,6
280	27250250070019.1	700 ±10	299	3,9
315	27315315070019.1	700 ±10	336	3,9
355	27355355070019.1	700 ±10	378	4,5
400	27400400070019.1	700 ±10	420	5,3
450	27450450070019.1	700 ±10	470	5,2
500	27500500070019.1	700 ±10	520	5,8
560	265608807019.1	700 ±10	581	6,0
630	266309807019.1	700 ±10	659	7,0
710	267109807019	700 ±10	738	9,8
800	268001117019	700 ±10	836	11
900	269001207019	700 ±10	936	12,5

\*WT concern raw PE pipe material thicknesses before expansion / downsizing

- ❖ Belmaflex End casings are also supplied in standard lengths 500mm and can be supplied in any other lengths on customer request
- ❖ In case of a need for a specific product please contact our sales department

**End casing, shrinkable, L=700mm, packed in foil**

### 3. Material

High density polyethylene (material classification PE100)

### 4. Marking

White identification label placed in the middle of the product with information about the product parameters and production date.

### 5. Packing

According to the agreement with the customer products can be additionally supplied with below accessories:

- mastic (integrated or loose)
- shrink collar (TPSM)
- welding and venting plugs

### 6. Transport

General transport conditions apply as follow:

- Transport on a pallets
- The pallet should be wrapped with protective plastic foil in order to protect against dust, dirt and damage
- Protect the cargo against sunlight,
- Protect the cargo against rainfall/snowfall
- Pallets should be protected against falling and movement during transportation

### 7. Storage

General storage conditions apply as follow:

- store indoors or under cover,
- store in vertical position on a flat surface,
- protect against the possibility of damaging of products protective plastic foil
- protect from sunlight
- protect against rainfall/snowfall.
- in order to not activate the shrinking process (from 50°C) store in maximal temperatures not higher than 40 ° C

Belmaflex is not responsible for product damages caused by inappropriate storage.