


Casing joint, shrinkable, L=1000mm, packed in foil, Standard

1. Product application

Belmaflex casing joints, shrinkable are designed to create a perfect and strong joint in the connection areas of the two preinsulated pipes.

2. Product parameters

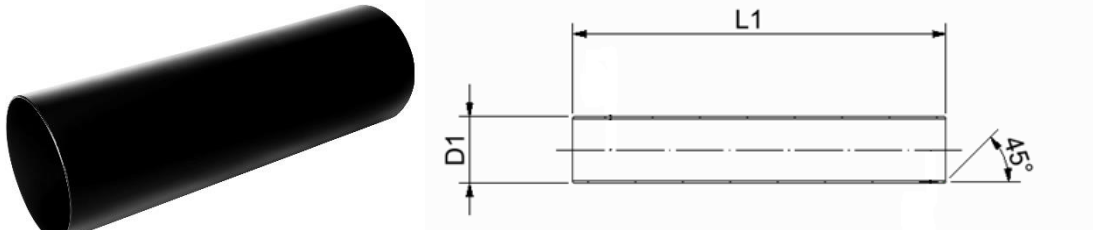

casing pipe outside diam [mm]	item no	L1 [mm]	min inside diameter before shrinking [mm]	WT* [mm]
75	1907530010010	1000 ±10	89	3,0
90	1909030010010	1000 ±10	105	3,0
110	1911030010010	1000 ±10	125	3,0
125	1912530010010	1000 ±10	140	3,0
140	1914030010010	1000 ±10	155	3,0
160	1916030010010	1000 ±10	176	3,0
180	1918030010010	1000 ±10	197	3,0
200	1920032010010	1000 ±10	217	3,2
225	1922534010010	1000 ±10	243	3,4
250	1925036010010	1000 ±10	269	3,6
280	1928039010010	1000 ±10	299	3,9
315	1931539010010	1000 ±10	336	3,9
355	1935545010010	1000 ±10	378	4,5
400	1940053010010	1000 ±10	420	5,3
450	1945052010010	1000 ±10	470	5,2
500	1950070010010	1000 ±10	520	7,0
500	1950078010010	1000 ±10	520	7,8
560	1956078010010	1000 ±10	581	7,8
560	1956088010010	1000 ±10	581	8,8
630	1963088010010	1000 ±10	659	8,8
630	1963009810010	1000 ±10	659	9,8
710	1971098010010	1000 ±10	738	9,8
710	1971011110010	1000 ±10	738	11,0
800	1980011110010	1000 ±10	836	11,0
800	1980012510010	1000 ±10	836	12,5
900	1990012510010	1000 ±10	936	12,5
900	1990012910011	1000 ±10	936	12,9

Casing joint, shrinkable, L=1000mm, packed in foil, Standard

1000	1910012910010	1000 ±10	1042	12,9
1000	1910013310011	1000 ±10	1042	13,3

*WT concern raw PE pipe material thicknesses before expansion / downsizing

- ❖ **Belmaflex Casing Joints are also supplied in standard lengths 500, 600, 700, 1200, 1400mm or can be supplied in any other lengths on customer request**
- ❖ **Belmaflex Casing Joints can be also supplied in **EXTRA WALL THICKNESS** version dedicated for electrical or extrusion welding**
- ❖ **In case of a need for a specific product please contact our sales department**

3. Material

High density polyethylene (material classification PE100)

4. Marking

White identification label placed in the middle of the joint with information about the product parameters and production date.

5. Packing

According to the agreement with the customer products can be additionally supplied with below accessories:

- mastic (integrated or loose)
- shrink collars (TPSM)
- welding and venting plugs

6. Transport

General transport conditions apply as follow:

- Transport on a pallets
- The pallet should be wrapped with protective plastic foil in order to protect against dust, dirt and damage
- Protect the cargo against sunlight,
- Protect the cargo against rainfall/snowfall
- Pallets should be protected against falling and movement during transportation

7. Storage

General storage conditions apply as follow:

- store indoors or under cover,
- store in vertical position on a flat surface,
- protect against the possibility of damaging of products protective plastic foil
- protect from sunlight
- protect against rainfall/snowfall.
- in order to not activate the shrinking process (from 50°C) store in maximal temperatures not higher than 40 ° C

Belmaflex is not responsible for product damages caused by inappropriate storage.