
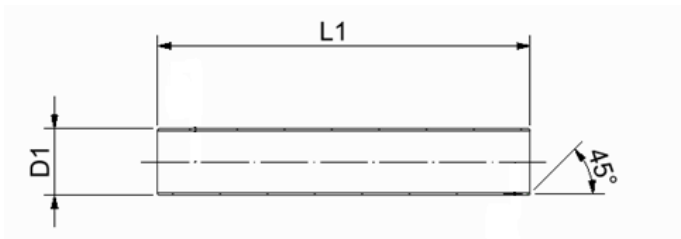


Casing joint, shrinkable, L=700mm, packed in foil, Extra wall thickness

1. Product application

Belmaflex casing joints, shrinkable with extra wall thickness are designed to create a perfect and strong joint in the connection areas of the two preinsulated pipes. The increased wall thickness makes that the products are suitable to be used for electrical welding or for extrusion welding as repair joints.

2. Product parameters

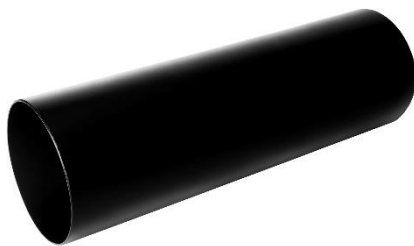

casing pipe outside diam [mm]	item no	L1 [mm]	min inside diameter before shrinking [mm]	WT* [mm]
90	110904007015	700 ±10	105	4,0
90	110905407019	700 ±10	105	5,4**
110	111104007015	700 ±10	125	4,0
110	111106607019	700 ±10	125	6,6**
125	111254107015	700 ±10	140	4,1
125	111254807019	700 ±10	140	4,8**
140	111404507015	700 ±10	155	4,5
140	111405407019	700 ±10	155	5,4**
160	111605007015	700 ±10	176	5,0
180	111805007015	700 ±10	197	5,0
200	112005007015	700 ±10	217	5,0
225	112255507015	700 ±10	243	5,5
250	112506107015	700 ±10	269	6,1
280	112806907015	700 ±10	299	6,9
315	113157707015	700 ±10	336	7,7
355	113557707015	700 ±10	378	7,7
400	114008007015	700 ±10	420	8,0
450	114509007015	700 ±10	470	9,0
500	115001007015	700 ±10	520	10,0
560	115601107015	700 ±10	581	11,0
630	116301207015	700 ±10	659	12,0
710	117101307015	700 ±10	738	13,0

*WT concern raw PE pipe material thicknesses before expansion / downsizing

**thicker wall thickness version for easier extrusion welding process

- ❖ **Belmaflex Casing Joints in extra wall thickness are also supplied in standard lengths 1000, 1400 or can be supplied in any other lengths on customer request**
- ❖ **In case of a need for a specific product please contact our sales department**

Casing joint, shrinkable, L=700mm, packed in foil, Extra wall thickness

3. Material

High density polyethylene (material classification PE100)

4. Marking

White identification label placed in the middle of the joint with information about the product parameters and production date.

5. Packing

According to the agreement with the customer products can be additionally supplied with below accessories:

- mastic (integrated or loose)
- shrink collars
- welding and venting plugs

6. Transport

General transport conditions apply as follow:

- Transport on a pallets
- The pallet should be wrapped with protective plastic foil in order to protect against dust, dirt and damage
- Protect the cargo against sunlight,
- Protect the cargo against rainfall/snowfall
- Pallets should be protected against falling and movement during transportation

7. Storage

General storage conditions apply as follow:

- store indoors or under cover,
- store in vertical position on a flat surface,
- protect against the possibility of damaging of products protective plastic foil
- protect from sunlight
- protect against rainfall/snowfall.
- in order to not activate the shrinking process (from 50°C) store in maximal temperatures not higher than 40 ° C

Belmaflex is not responsible for product damages caused by inappropriate storage.