
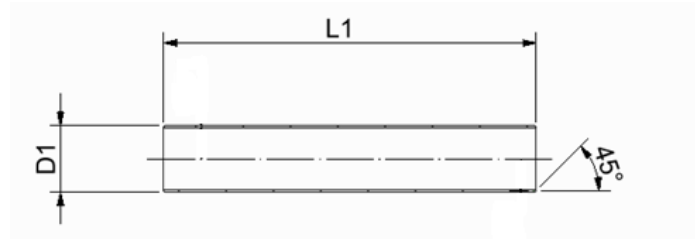


Casing joint, sliding, L=700mm, Standard

1. Product application

Belmaflex casing joints, sliding are designed to be a part of the joint connection system between the two preinsulated pipes. Each product diameter is perfectly matched to fit well on the designated preinsulated casing pipe dimension.

2. Product parameters

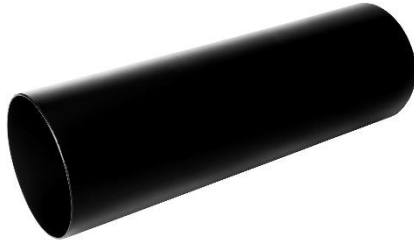

casing pipe outside diam [mm]	item no	L1 [mm]	minimal inside diameter [mm]	minimal WT* [mm]
90	200903007029	700 ±10	96	3,0
110	201103007029	700 ±10	116	3,0
125	201253007029	700 ±10	132	3,0
140	201403007029	700 ±10	147	3,0
160	201603007029	700 ±10	168	3,0
180	201803507029	700 ±10	189	3,2
200	202003507029	700 ±10	209	3,4
225	202253507029	700 ±10	232	3,6
250	202503907029	700 ±10	263	3,9
280	202803907029	700 ±10	289	3,9
315	203154907029	700 ±10	325	4,5
355	203555607029	700 ±10	366	4,5
400	204006307029	700 ±10	412	4,8
450	204507507029	700 ±10	464	5,2

*WT concern raw PE pipe material thicknesses before expansion / downsizing

- ❖ **Belmaflex Casing Joints, sliding can be also supplied in other lengths and dimensions on customer request**
- ❖ **In case of a need for a specific product please contact our sales department**

3. Material

High density polyethylene (material classification PE100)

4. Marking

White identification label placed in the middle of the joint with information about the product parameters and production date.

Casing joint, sliding, L=700mm, Standard

5. Packing

According to the agreement with the customer products can be additionally supplied with below accessories:

- white foil packing
- shrink collars (TPSM)
- welding and venting plugs

6. Transport

General transport conditions apply as follow:

- Transport on a pallets
- The pallet should be wrapped with protective plastic foil in order to protect against dust, dirt and damage
- Protect the cargo against sunlight,
- Protect the cargo against rainfall/snowfall
- Pallets should be protected against falling and movement during transportation

7. Storage

General storage conditions apply as follow:

- store indoors or under cover,
- store in vertical position on a flat surface,
- protect from sunlight
- protect against rainfall/snowfall.
- in order to not activate the shrinking process (from 50°C) store in maximal temperatures not higher than 40 ° C

Belmaflex is not responsible for product damages caused by inappropriate storage.