

End casing, shrinkable, L=500mm, packed in foil


1. Product application

Belmaflex end casings, shrinkable are designed to create a perfect and strong finish on the pre-insulated pipe.

2. Product parameters

Ø 90 - 225

Ø 250 – 900

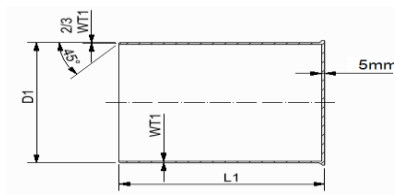

casing pipe outside diam [mm]	item no	L1 [mm]	min inside diameter before shrinking [mm]	WT* [mm]
90	27090090050019	500 ±10	105	3
110	27110110050019.1	500 ±10	122	3
125	27125125050019.1	500 ±10	140	3
140	27140140050019.1	500 ±10	155	3
160	27160160050019.1	500 ±10	176	3
180	27180180050019.1	500 ±10	197	3
200	27200200050019.1	500 ±10	217	3,2
225	27225225050019.1	500 ±10	243	3,4
250	27250250050019.1	500 ±10	269	3,6
280	27280280050019.1	500 ±10	299	3,9
315	27315315050019.1	500 ±10	336	3,9
355	27355355050019.1	500 ±10	378	4,5
400	27400400050019.1	500 ±10	420	5,3
450	27450450050019.1	500 ±10	470	5,2
500	27500500050019.1	500 ±10	520	5,8
560	265608805019.1	500 ±10	581	6,0
630	266309805019.1	500 ±10	659	7,0
710	267101105019	500 ±10	738	9,8
800	268001115019	500 ±10	836	11
900	269001205019	500 ±10	936	12,5

*WT concern raw PE pipe material thicknesses before expansion / downsizing

- ❖ Belmaflex End casings are also supplied in standard lengths 500mm and can be supplied in any other lengths on customer request
- ❖ In case of a need for a specific product please contact our sales department

End casing, shrinkable, L=500mm, packed in foil

3. Material

High density polyethylene (material classification PE100)

4. Marking

White identification label placed in the middle of the product with information about the product parameters and production date.

5. Packing

According to the agreement with the customer products can be additionally supplied with below accessories:

- mastic (integrated or loose)
- shrink collar (TPSM)
- welding and venting plugs

6. Transport

General transport conditions apply as follow:

- Transport on a pallets
- The pallet should be wrapped with protective plastic foil in order to protect against dust, dirt and damage
- Protect the cargo against sunlight,
- Protect the cargo against rainfall/snowfall
- Pallets should be protected against falling and movement during transportation

7. Storage

General storage conditions apply as follow:

- store indoors or under cover,
- store in vertical position on a flat surface,
- protect against the possibility of damaging of products protective plastic foil
- protect from sunlight
- protect against rainfall/snowfall.
- in order to not activate the shrinking process (from 50°C) store in maximal temperatures not higher than 40 ° C

Belmaflex is not responsible for product damages caused by inappropriate storage.